

**MAX**

**TVINTIER®**

**RB611T**

**ENGINEERED FOR  
PERFORMANCE**

**TIES UP TO #9 X #10 WITH 19GA. WIRE**



**MAXIMIZE YOUR  
TYING CAPACITY**



# MAX

ENGINEERED FOR PERFORMANCE

# TYNTIER®

## RB611T

### FEATURES/BENEFITS

#### 1 MAXIMIZE YOUR REBAR TYING CAPACITY

Largest jaw size of any battery powered rebar tying tool on the market. Ties up to #9 x #10 rebar\*

*\*Varies by rebar manufacturer*

#### 2 DOUBLE THE SPEED

A Dual Wire Feeding Mechanism (Patented) increases productivity.

#### 3 COST SAVING

A Wire Pull-Back Mechanism (Patented) dispenses the precise amount of wire needed to form a tie, reducing wire usage.

#### 4 SHORTER TIE HEIGHT

A Wire Bending Mechanism (Patented) produces a shorter tie height. Less concrete is needed to fully cover a wire tie.

#### 5 LONG LASTING BATTERY

One charge of the battery can yield up to 5000 ties.

#### 6 ENCLOSED DESIGN

Greater protection against debris and moisture entering the tool.



#### 7 EASY PUSH GEAR RELEASE

Effortlessly open gears to quickly feed wire when loading the tool.

#### 8 QUICKLY & EASILY LOAD TIE WIRE

Rapidly load the dual wire coil with the quick load magazine design.

#### 9 BRUSHLESS TWISING MOTOR


Promotes energy efficiency and long lasting life for the tool versus a brushed motor

### TOOL SPECIFICATIONS

|                    |   |
|--------------------|---|
| Weight             | 5.7lbs  |
| H x W x L          | 11 <sup>7</sup> / <sub>8</sub> " x 4 <sup>7</sup> / <sub>8</sub> " x 13 <sup>7</sup> / <sub>8</sub> " |
| Tying Speed        | Approx. 1/2 Sec./Tie  |
| Rebar Capacity     | #5x#5 up to #9 x #10<br><i>*Varies by rebar manufacturer</i>  |
| Wire Series        | TW1061T   |
| Wire Diameter      | 19ga.   |
| Ties Per Coil      | Approx. 115 to 205  |
| Ties Per Charge    | Approx. 5000  |
| Coils Per Box      | 30  |
| Battery            | JPL91450A   |
| Voltage            | DC 14.4V  |
| Recharge Time      | Approx. 80% Capacity - 60 minutes<br>100% Capacity - 80 minutes                                       |
| Standard Equipment | Battery, Charger, Belt-Hook and Plastic Carrying Case   |


### MULTIPLE REBAR COMBINATIONS

4 BARS




MINIMUM  
#3 x #3 x #3 x #3  
MAXIMUM  
#6 x #6 x #6 x #6

3 BARS



MINIMUM  
#3 x #3 x #3  
MAXIMUM  
#12 x #5 x #5

### TW1061T TIE WIRE SERIES

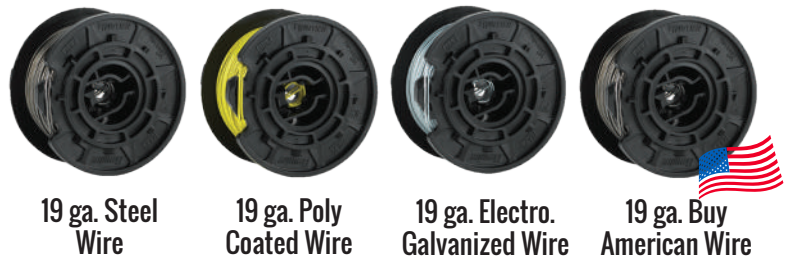

19 ga. Steel Wire

19 ga. Poly Coated Wire

19 ga. Electro. Galvanized Wire

19 ga. Buy American Wire

TW1061T-S STAINLESS STEEL WIRE IS ALSO AVAILABLE AS A SPECIAL ORDER ITEM.

### APPLICATIONS

Commercial Buildings | Foundations | Road and Bridge Construction | Precast Plants | Retaining Walls  
Electrical Conduits | Water Treatment Tanks | Basements | Water Retaining Structures | Radiant Tubing

# MAX

## MAX USA CORP.

205 Express St, Plainview NY 11803

800-223-4293

www.maxusacorp.com

DEALER: